

**FASSI GROUP** 










- > REMOVABLE HOOK or with safety latch
- > THE MARREL TILTING FRAME provides unmatched lifting capacity
- > SHOT BLASTING AND PAINTING > END-OF-STROKE DAMPER before assembly
- > CUSTOMIZATION: color on demand and wide range of accessories
- > OPTIMIZED EQUIPMENT HEIGHT
  - **INTEGRATED** into the arm cylinders

FICHEPRODUIT/AL16/ 042021/500EN — ohistudio (.fr)

## TELESCOPIC JIB 16T CAPACITY

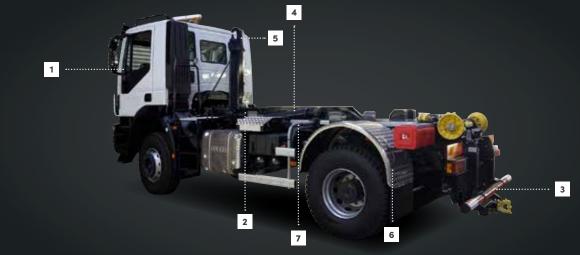

## **OPTIONS**



Available controls: electrical, radio control



Front hydraulic locks



PANTO rear underrun protection, adjustable or fixed



Additional hydraulic lines (for cranes, rear tipper trailer...)



Hook with mechanical or pneumatic safety latch



Vehicle stability systems

7

Attachments brackets suited for various truck models

Other options available for custom configuration

## **TECHNICAL DATA**

For GVW 15 to 26 T		S40	<b>S41</b>	<b>S42</b>	<b>S43</b>	<b>S44</b>	S45	<b>S46</b>	S47	S48	S49	S50	<b>S51</b>	S52	S53
	Min. container length (mm)	3 700	3 700	3 700	3 700	4 000	3 700	4 000	4 000	4 000	4 000	4 100	4 300	4 300	4 400
	Max. container length (mm)	5 100	5 200	5 300	5 400	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300	6 400
	Container length with fixed RUP (mm)	4 500	4 600	4 700	4 800	4 900	5 000	5 100	5 200	5 300	5 400	5 500	5 600	5 700	5 800
Кg	Weight (kg)	1 650	1 650	1 675	1 675	1 700	1 700	1 725	1 750	1 750	1 750	1 750	1 950	1 950	1 950

For GVW 15 to 26 T		<b>S54</b>	<b>S55</b>	<b>S</b> 56	<b>S57</b>	<b>S58</b>
← LG →	Min. container length (mm)	4 600	4 600	4 600	4 600	4 600
	Max. container length (mm)	6 500	6 700	6 800	6 900	7 000
	Container length with fixed RUP (mm)	5 900	6 000	6 100	6 200	6 300
Kg	Weight (kg)	2 075	2 090	2 095	2 095	2 100

Subject to technical modification; data not binding. Depending on the market. Chassis recommended.

## +33 (0)4 77 36 28 28

42 avenue de Saint-Étienne – BP70056 42161 Andrézieux-Bouthéon cedex FRANCE



