

AL14PA

TELESCOPIC AND
ARTICULATED JIB
14T CAPACITY

GENERATION

S

+ CAST PARTS FOR
HIGH-STRESS AREAS

HIGH TENSILE
STEEL +

+ INTEGRATED SAFETY
TO PREVENT MISS-USE

+ MARREL
MANUFACTURED
CYLINDERS




HIGH- LIGHTS

- > **REDUCTION OF LOADING ANGLE**
- > **GREATER RANGE** of container lengths
- > **WELDED HOOK** with pneumatic safety latch
- > **THE MARREL TILTING FRAME** provides unmatched lifting capacity
- > **SHOT BLASTING AND PAINTING** before assembly
- > **CUSTOMIZATION:** color on demand and wide range of accessories
- > **OPTIMIZED EQUIPMENT HEIGHT**
- > **END-OF-STROKE DAMPER INTEGRATED** into the arm cylinders

AMPLIROLL® HIGH

AL14PA

TELESCOPIC AND
ARTICULATED JIB
14T CAPACITY

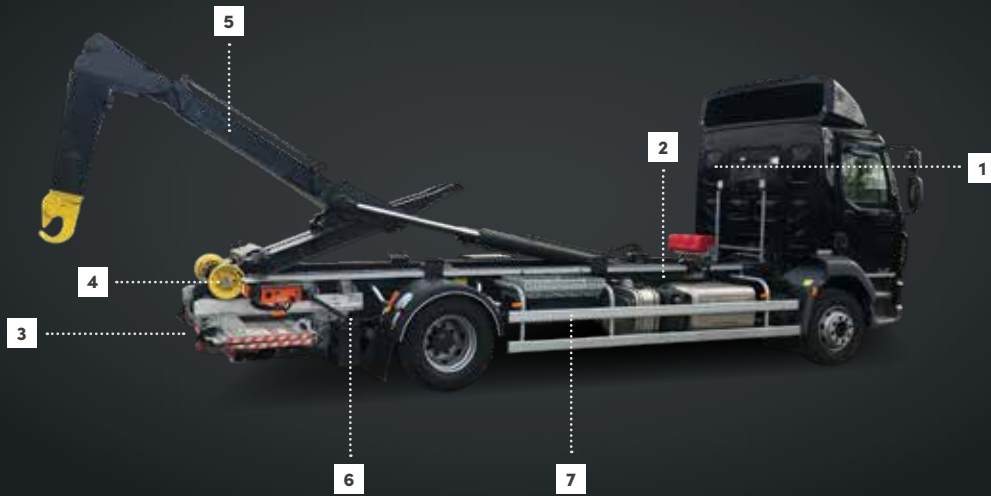

OPTIONS



Available controls:
electrical, radio
control



Front hydraulic
locks



PANTO rear
underrun protection
adjustable or fixed



Additional
hydraulic lines
(for cranes, rear
tipper trailer...)



High speed



Vehicle stability
systems



Attachments
brackets suited
for various truck
models

Other options available for custom configuration

FICHEPRODUIT/AL14PA/042021/500EN — ohstudio.fr

TECHNICAL DATA

For GVW 15 to 19 T chassis		S44	S45	S46	S47	S48	S49	S50	S51	S52	S53	S54	S55	S56	S57	S58
	Min. container length (mm)	3 200	3 200	3 200	3 200	3 200	3 200	3 500	3 500	3 500	3 800	3 800	3 800	3 800	3 800	3 900
	Max. container length (mm)	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300	6 400	6 500	6 700	6 800	6 900	7 000
	Container length with fixed RUP (mm)	4 900	5 000	5 100	5 200	5 300	5 400	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300
	Weight (kg)	1 900	1 900	1 925	1 925	1 950	1 975	1 975	1 975	2 115	2 135	2 175	2 245	2 245	2 250	2 255

Subject to technical modification; data not binding.
Depending on the market. Chassis recommended.

AMPLIROLL® HIGH

+33 (0)4 77 36 28 28
42 avenue de Saint-Étienne – BP70056
42161 Andrézieux-Bouthéon cedex
FRANCE

in f @marrelsas



MARREL.COM